



90F...WN 07



90° 페이스 밀






NEW



규격	인서트		치수(mm)				중량 (Kg)	장착부 볼트
			D	Da	L	ap		
90F4-D40-16R-WN07	WNKU 0704	4	40	16	40	6	0.24	SH M8X1.25X30
90F4-D50-22R-WN07		4	50	22	40	6	0.31	SH M10X1.5X30
90F6-D50-22R-WN07		6	50	22	40	6	0.3	SH M10X1.5X30
90F4-D63-22R-WN07		4	63	22	40	6	0.49	SH M10X1.5X30
90F6-D63-22R-WN07		6	63	22	40	6	0.49	SH M10X1.5X30
90F7-D63-22R-WN07		7	63	22	40	6	0.48	SH M10X1.5X30
90F5-D80-27R-WN07		5	80	27	50	6	0.94	SH M12X1.75X35
90F7-D80-27R-WN07		7	80	27	50	6	0.97	SH M12X1.75X35
90F9-D80-27R-WN07		9	80	27	50	6	0.96	SH M12X1.75X35
90F6-D100-32R-WN07		6	100	32	50	6	1.87	SH M16X2X35
90F8-D100-32R-WN07		8	100	32	50	6	1.92	SH M16X2X35
90F11-D100-32R-WN07		11	100	32	50	6	1.92	SH M16X2X35
90F7-D125-40R-WN07		7	125	40	63	6	2.9	SH M20X2.5X40
90F11-D125-40R-WN07		11	125	40	63	6	2.91	SH M20X2.5X40
90F14-D125-40R-WN07		14	125	40	63	6	2.98	SH M20X2.5X40

	부품	
	스크류	렌치
	DS 35A088I/HG-TS	DTDW-10P

90° 페이스 밀

[illegible]132

90° 엔드밀








Fig.2

	부품	
	스크류	렌치
		
	DS 35A088I/HG-TS	DTDW-10P

모듈러 90° 엔드밀








NEW

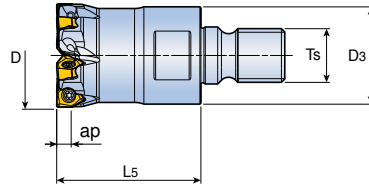[illegible]

	부품	
	스크류	렌치
		
	DS 35A088/HG-TS	DTDW-10P

90° 페이스 밀

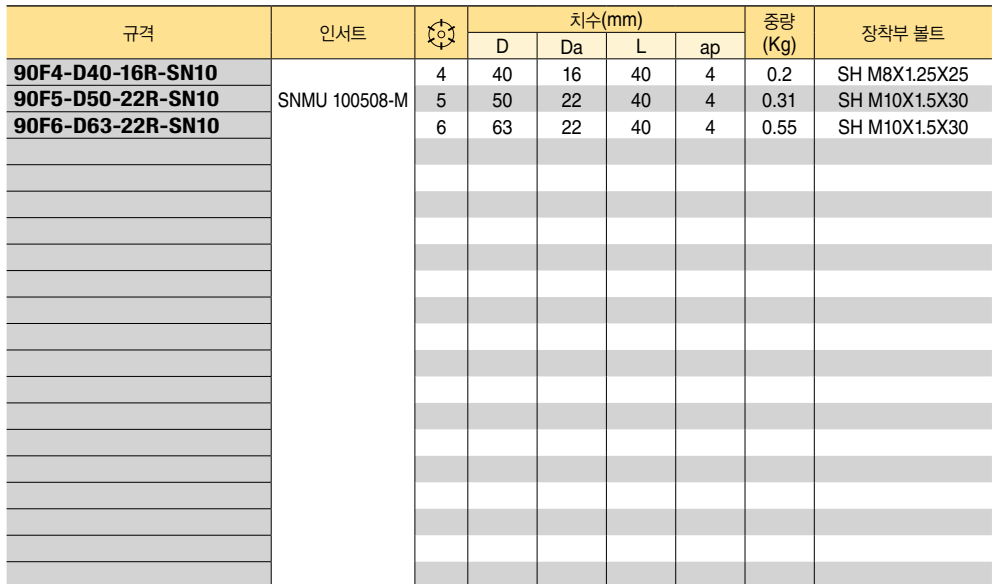




	부품	
	스크류	렌치
		
	DS 40B100I-TS	DTTW-15

90E...T0 10



90° 엔드밀


NEW

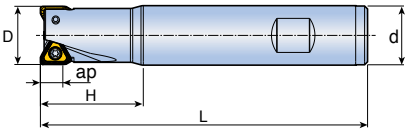

규격	인서트		치수(mm)					중량 (Kg)
			D	d	H	L	ap	
90E2-02020W-T010N-L110	TOMX 100408 PDTR-DM	2	20	20	30	110	6	0.2
90E2-02120-T010N-L200		2	21	20	30	200	6	0.5
90E2-02220W-T010N-L100		2	22	20	30	100	6	0.2
90E3-02525W-T010N-L110		3	25	25	30	110	6	0.4
90E2-02625-T010N-L250		2	26	25	30	250	6	0.9
90E3-03025W-T010N-L110		3	30	25	30	110	6	0.4
90E4-03232W-T010N-L130		4	32	32	30	130	6	0.8
90E3-03332-T010N-L250		3	33	32	30	250	6	1.5
90E4-04032-T010N-L200		4	40	32	40	200	6	1.2

	부품	
	스크류	렌치
	DS 30B068I/HG-TS	DTDW-8

• 램핑 프로그램 참고: 209 쪽



	부품	
	스크류	렌치
		
	DS 25055/HG-TS	DTDW-8




Fig.2







Fig.3


[illegible]

	부품	
	스크류	렌치
		
	DS 25055I/HG-TS	DTDW-8



• 16R이상 인서트 사용 시 커터 바디는 코너 반경 "인서트 코너" -0.5mm로 수정 요망

	부품	
	스크류	렌치
		
90F4-D40-16-APM16	DS 40093I-TS	DTDW-15
90F4-D50-22-APM16		
90F5-D63-22-APM16		
90F6-D80-25.4-APM16	DS 40120I-TS	
90F6-D80-27-APM16		
90F6-D100-32-APM16		
90F8-D100-32-APM16		



Technical drawing of a Tee fitting. The drawing includes a side view on the left and an end view on the right. The side view shows the fitting's profile with dimensions: D (outer diameter), H (height of the side branch), and L (total length). The end view shows the circular face with dimension C (inner diameter of the side branch). The fitting is labeled "1/2" NPT x 1/2" NPT Tee".

[illegible]

-
- A diagram showing a cross-section of a mechanical assembly. A yellow component, likely a bearing or a bush, is shown in a housing. A vertical shaft passes through the center of the assembly. The yellow component is positioned between two other parts, one of which is a darker grey. The assembly is shown in a cross-sectional view, with a dashed line indicating the center of the shaft.

부품	
스크류	렌치
	
DS 40085I-TS	DTDW-15
DS 40093I-TS	

90F...AP 16



90° 페이스 밀




Fig.1




Fig.2

규격	인서트		치수(mm)			Fig.	장착부 볼트
			D	Da	L		
90F3-D40-16-AP16	APKT 1604	3	40	16	40	1	SH M8 X 1.25 X 30
90F3-D50-22-AP16		3	50	22	40	1	SH M10 X 1.5 X 30
90F4-D63-22-AP16		4	63	22	40	1	SH M10 X 1.5 X 30
90F5-D80-27-AP16		5	80	27	50	1	SH M12 X 1.75 X 35
90F6-D100-32-AP16		6	100	32	50	2	-

	부품	
	스크류	렌치
90F-D40 - 90F-D63	DS 40093I-TS	 DTTW-15
90F-D80 - 90F-D100	DS 40120I-TS	

90° 엔드밀


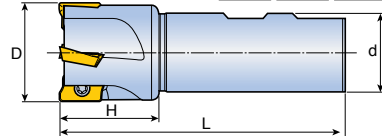


Fig.1

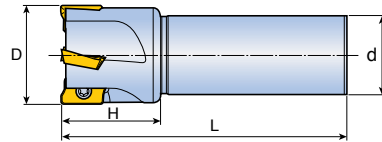


Fig.2

	부품	
	스크류	렌치
		
90E02020 - 90E02525	DS40085I-TS	DTDW-15
90E02626 - 90E04032	DS40120I-TS	




Fig.1




Fig.2






Fig.3

[illegible]

부품				
심	웻지	심 스크류	웻지 스크류	렌치
DSPT 22N	DWPA 8	DS 40B100I-TS	DS 80200W-TS, *DS 80160W-TS	DTTW-4

• * DS 80160W-TS: Ø80에만 적용 • 인서트 혼용 사용 금지



	부품					
	심	웬지	심 스크류	웬지 스크류	렌치	심 스크류 렌치
						 (1)
DSTE 22N	DWPA 8	DS 40B100I-TS	DS 80160W-TS	DTTW-4	DTTW-15	



Member WAC Group
Duracarb