





다밀

[illegible]



	부품				
	심	웻지	심 스크류	웻지 스크류	렌치
					
	DSSP 12N	DWPA 8	DS 40B100I-TS	DS 80200W-TS, *DS 80160W-TS	DTTW-4

146

DMFN75...SP 12/15 (ISO 인서트)






75° 페이스 밀, 웬지 + 심 클램핑



규격	인서트		치수(mm)					
			D	D1	d	L	H	ap
DMFN75-D63-SP12	SPKN 1203 EDR-HPN	3	63	68.3	32	115	35	8
	SPKN 1203 EDSR-EM	3	63	68.3	32	115	35	8
	SPKN 1203 EDSR-HPN	3	63	68.3	32	115	35	8
	SPKR 1203 EDR-EM	3	63	68.3	32	115	35	8
DMFN75-D80-SP15	SPKN 1504 EDR-HPN	4	80	86.9	42	115	35	12
	SPKN 1504 EDSR-EM	4	80	86.9	42	115	35	12
	SPKN 1504 EDSR-HPN	4	80	86.9	42	115	35	12
	SPKR 1504 EDSR-EM	4	80	86.9	42	115	35	12

	부품				
	심	웬지	심 스크류	웬지 스크류	렌치
DMFN75-D63-SP12	DSSP 12N			DS 80200W-TS	
DMFN75-D80-SP15	DSSP 15N			DS 80160W-TS	

•인서트 혼용 사용 금지




	부품				
	심	웬지	심 스크류	웬지 스크류	렌치
	 DSSP 15N	 DWPA 8	 DS 40B100I-TS	 DS 80200W-TS, *DS 80160W-TS	 DTTW-4

148

75F...SN 12-N







75° 페이스 밀

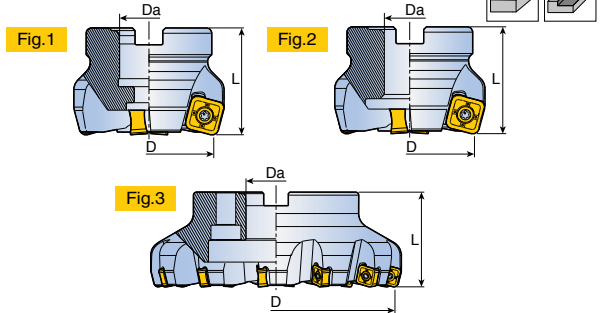

규격	인서트		치수(mm)			중량 (Kg)	Fig.	장착부 볼트
			D	Da	L			
75F4-D40-22R-SN12-N	SNGU 1205 XTN SNKU 1205 XTN	4	40	22	40	0.3	1	LH M10X1.5X25
75F6-D50-22R-SN12-N		6	50	22	40	0.3	1	LH M10X1.5X25
75F6-D63-22R-SN12-N		6	63	22	40	0.5	1	LH M10X1.5X25
75F8-D63-22R-SN12-N		8	63	22	40	0.5	1	LH M10X1.5X25
75F7-D80-25.4R-SN12-N		7	80	25.4	50	1.3	1	LH M12X1.75X30
75F7-D80-27R-SN12-N		7	80	27	50	1.2	1	LH M12X1.75X30
75F9-D80-27R-SN12-N		9	80	27	50	1.2	1	LH M12X1.75X30
75F10-D80-25.4R-SN12-N		10	80	25.4	50	1.3	1	LH M12X1.75X30
75F10-D80-27R-SN12-N		10	80	27	50	1.2	1	LH M12X1.75X30
75F8-D100-31.75R-SN12-N		8	100	31.75	50	1.7	2	-
75F8-D100-32R-SN12-N		8	100	32	50	1.8	1	LH M16X2X35
75F8-D100-32L-SN12-N		8	100	32	50	1.9	1	LH M16X2X35
75F12-D100-31.75R-SN12-N		12	100	31.75	50	1.7	2	-
75F12-D100-32R-SN12-N		12	100	32	50	1.9	1	LH M16X2X35
75F10-D125-38.1R-SN12-N		10	125	38.1	63	2.9	2	-
75F10-D125-40R-SN12-N		10	125	40	63	3	1	SH M20X2.5X40
75F16-D125-31.8R-SN12-N		16	125	31.8	63	2.9	2	-
75F16-D125-40R-SN12-N		16	125	40	63	3	1	SH M20X2.5X40
75F12-D160-40R-SN12-N		12	160	40	63	4.6	3	-
75F12-D160-50.8R-SN12-N		12	160	50.8	63	4.8	2	-
75F20-D160-50.8R-SN12-N		20	160	50.8	63	4.8	2	-
75F22-D200-60R-SN12-N		22	200	60	63	6.2	3	-
75F19-D315-60R-SN12-N		19	315	60	63	18	3	-

	부품	
	스크류	렌치
	DS 40B100I-TS	DTTW-15

75° 페이스 밀

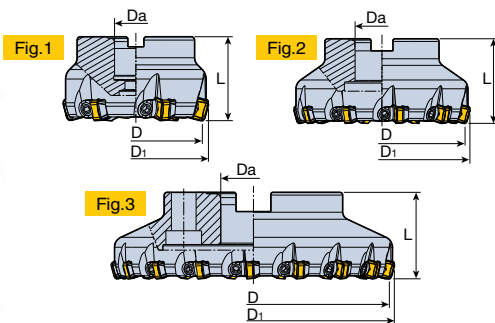[illegible]150